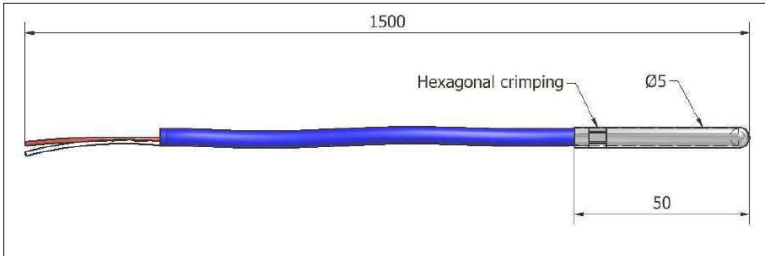


Data sheet

ENGLISH


RTD Ø5 x 50 . Pt1000 . 2 wires . Length 1.5m
RANGE : -20°C / +100°C
USE : Universal
KEY POINT : Flexible
SPECIFICATIONS: PT1000Ω thermic element A Class – 1x2 wires Tip protector in SS304L Cable 2 conductors, isolated PVC/PVC Hexagonal crimping
DIMENSIONS: Tip protector length = 50mm Tip protector diameter = 5mm Total length (tip + cable) = 1500mm
METROLOGICAL DATA : As per IEC 751 Standard tolerance PT1000 A class : ±0.15 + 0.002.[t°C]

CE+T do recommend to install the Measure box close to the battery to measure precisely battery voltage , temperature. The temperature probe can be extended by connecting the temperature probe to longer cable (twisted pair 2 wire).